



LMC5H

FVSA-SERIES

Single Auger

- 1 10- gauge hopper sides, 7-gauge longsills,7-gauge auger trough ('CS' Carbon)
- 2 12- gauge hopper sides, 10- gauge longsills,10- gauge auger trough ('SS' Stainless)
- 3 Direct drive motor
- 4 Side swing-up spinner with 18" steel spinner disc.
- 5 7" diameter hard surfaced auger with three pitch settings for even unloading, four bolt self-aligning ball bearing at front of auger, greasable from the rear of spreader.
- 6 Top screens.
- 7 Inverted V.



FLINK'S FVSA-SERIES V-BOX SPREADER
LMC5H HOPPER SPREADER

CARBON STEEL BODY

Constructed of 10 gauge steel with 45° sloping sides with 10 gauge side supports for high resistance to twisting under heavy loads.

AUGER

7" Hard faced auger with direct drive.

SPINNER ASSEMBLY

Swing up assembly with 18" steel spinner disc, four external baffles

TOP SCREENS

Section top screens are made of 3/8" diameter rods welded to a 1/4" x 2" angle iron frame creating a maximum opening of 2-1/2."

INVERTED V

Standard equipment with the purchase of FVSA spreader.


GREASE EXTENSION

Grease extension to the rear- standard equipment.

OPTIONS:



- Hand crank winch for swing up spinner
- Pre-wet systems

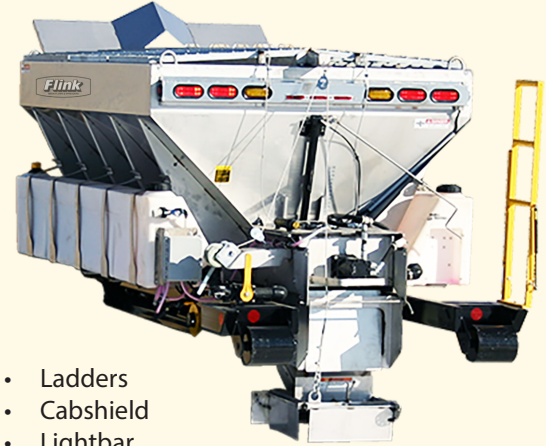

- Ladders
- Cabshield
- Lightbar
- Feed Gate
- Roll off mounting kits

FVSA-SERIES SPREADER SPECIFICATIONS

| MODEL NO. | V-BOX LENGTH | V-BOX HEIGHT | CAB TO AXLE | CU. YARD CAPACITY | APPROX. WEIGHT |
|-----------|--------------|--------------|-------------|-------------------|----------------|
| FVSA-1048 | 10' | 48" | 84" | 5.6 | 2,385 LBS |
| FVSA-1054 | 10' | 54" | 84" | 6.9 | 2,480 LBS |
| FVSA-1060 | 10' | 60" | 84" | 8.3 | 2,575 LBS |
| FVSA-1148 | 11' | 48" | 96" | 6.2 | 2,525 LBS |
| FVSA-1154 | 11' | 54" | 96" | 7.6 | 2,625 LBS |
| FVSA-1160 | 11' | 60" | 96" | 9.0 | 2,725 LBS |
| FVSA-1248 | 12' | 48" | 108" | 6.8 | 2,695 LBS |
| FVSA-1254 | 12' | 54" | 108" | 8.4 | 2,800 LBS |
| FVSA-1260 | 12' | 60" | 108" | 9.9 | 2,905 LBS |
| FVSA-1348 | 13' | 48" | 96" C.T. | 7.3 | 2,835 LBS |
| FVSA-1354 | 13' | 54" | 96" C.T. | 9.0 | 2,945 LBS |
| FVSA-1360 | 13' | 60" | 96" C.T. | 10.7 | 3,055 LBS |
| FVSA-1448 | 14' | 48" | 108" C.T. | 7.9 | 3,005 LBS |
| FVSA-1454 | 14' | 54" | 108 C.T. | 9.7 | 3,120 LBS |
| FVSA-1460 | 14' | 60" | 108" C.T. | 11.6 | 3,235 LBS |
| FVSA-1548 | 15' | 48" | 120" C.T. | 8.4 | 3,145 LBS |
| FVSA-1554 | 15' | 54" | 120" C.T. | 10.3 | 3,265 LBS |
| FVSA-1560 | 15' | 60" | 120" C.T. | 12.2 | 3,385 LBS |

Longer lengths available upon request



- Catwalks
- 12-gauge stainless steel V-box construction (optional 10-gauge stainless)

OPTIONS NOT SHOWN:

- Doghouse cutout for dump body hoist
- Rear direct drive motor
- Front planetary drive



FLINK PRODUCT
MANUFACTURED BY:



AUTHORIZED DEALER: