



LMC5H

FVDA-SERIES
Dual Auger

- 1 10- gauge hopper sides, 7-gauge longsills, 7-gauge auger trough ('CS' Carbon)
- 2 12- gauge hopper sides, 10- gauge longsills, 10- gauge auger trough ('SS' Stainless)
- 3 Twin counter-rotating 7" diameter hard surfaced augers with three pitch settings for even unloading, two bolt self-aligning ball bearings at rear of auger
- 4 Rear swing-up spinner with 18" steel spinner disc.
- 5 Twin planetary drive system, protected at front of hopper.
- 6 Inverted V.
- 7 Galvanized top screens.



FLINK'S FVDA-SERIES V-BOX SPREADER
LMC5H HOPPER SPREADER



OPTIONS:

- Poly light bar
- 12- gauge stainless steel V-box construction (optional 10- gauge stainless)
- Poly tanks

CARBON STEEL BODY

Constructed of 10 gauge steel with 45° sloping sides with 10 gauge side supports for high resistance to twisting under heavy loads.

AUGER

7" Hard faced auger with direct drive.

SPINNER ASSEMBLY

Swing up assembly with 18" steel spinner disc, four external baffles

TOP SCREENS


Section top screens are made of 3/8" diameter rods welded to a 1/4" x 2" angle iron frame creating a maximum opening of 2-1/2."

INVERTED V

Standard equipment with the purchase of FVDA spreader.

GREASE EXTENSION

Grease extension to the rear- standard equipment.

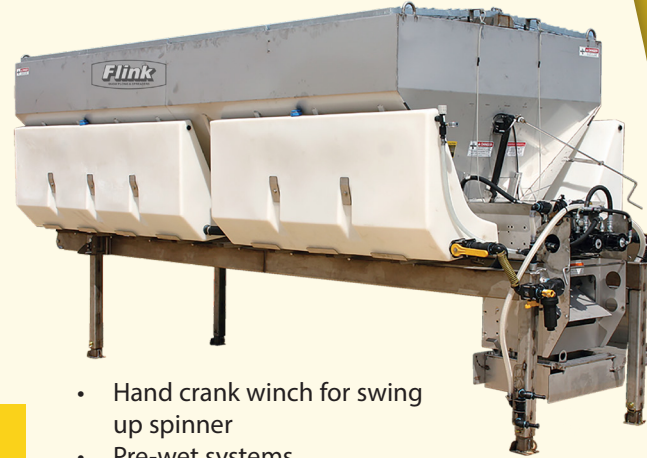

- Hand crank winch for swing up spinner
- Pre-wet systems
- Leg stand kits
- Rear planetary drive
- Feed gate

FVDA-SERIES SPREADER SPECIFICATIONS

MODEL NUMBER	V-BOX LENGTH	V-BOX HEIGHT	CAB TO AXLE	CU.YD. CAPACITY	APPROX WEIGHT
FVDA-1048	10'	48"	84"	5.6	2,685 LBS
FVDA-1054	10'	54"	84"	6.9	2,780 LBS
FVDA-1060	10'	60"	84"	8.3	2,875 LBS
FVDA-1148	11'	48"	96"	6.2	2,825 LBS
FVDA-1154	11'	54"	96"	7.6	2,925 LBS
FVDA-1160	11'	60"	96"	9.0	3,025 LBS
FVDA-1248	12'	48"	108"	6.8	2,995 LBS
FVDA-1254	12'	54"	108"	8.4	3,100 LBS
FVDA-1260	12'	60"	108"	9.9	3,205 LBS
FVDA-1348	13'	48"	96" C.T.	7.3	3,135 LBS
FVDA-1354	13'	54"	96" C.T.	9.0	3,245 LBS
FVDA-1360	13'	60"	96" C.T.	10.7	3,355 LBS
FVDA-1448	14'	48"	108" C.T.	7.9	3,305 LBS
FVDA-1454	14'	54"	108 C.T.	9.7	3,420 LBS
FVDA-1460	14'	60"	108" C.T.	11.6	3,535 LBS
FVDA-1548	15'	48"	120" C.T.	8.4	3,445 LBS
FVDA-1554	15'	54"	120" C.T.	10.3	3,565 LBS
FVDA-1560	15'	60"	120" C.T.	12.2	3,685 LBS

Longer lengths available upon request



- Lighting packages
- Spill shields
- Ladders

OPTIONS NOT SHOWN:

- Doghouse cutout for dump body hoist
- Mounting kits
- Catwalks or fenders
- Cabshield
- Rear direct drive
- Front planetary drive



FLINK PRODUCT
MANUFACTURED BY:



AUTHORIZED DEALER: